


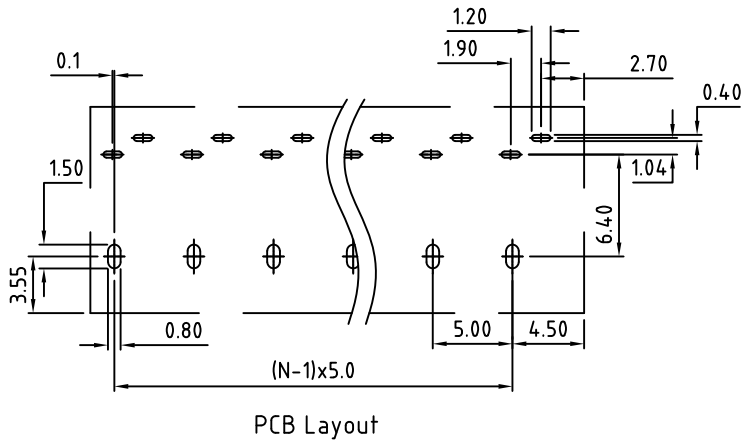
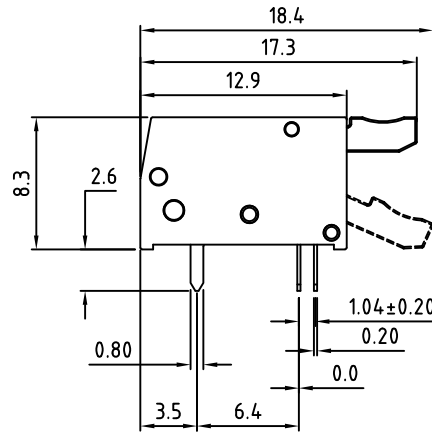
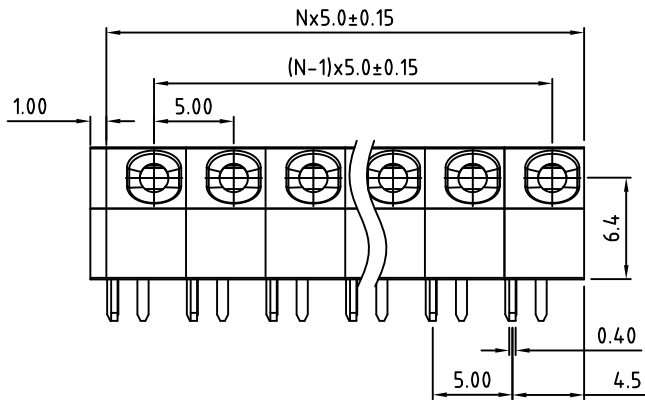


RoHS Compliant


Rev.	ECO#	Date	By
E	1883-12212	12/22/21	MWP

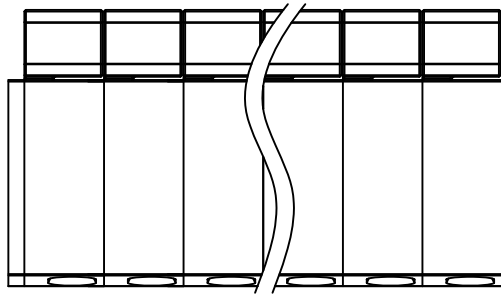

Switch Contact Detect Contact



Without Wire



Wire Inserted

Part Number Configuration.

EB4898-XX-X00

Number of Positions

Color
0-Black
8-Gray

MAX NUMBER OF POSITIONS = 24

Material:	
Contact:	PhBz, Tin Plated
Switch Contacts:	PhBz, Tin Plated
Wire Retention Spring:	Stainless Steel
Insulating Body, End Cap:	PA66, UL94V-0
Lever:	PA6, UL94V-0
Switch Contacts Insert:	PPA UL94V-0
Electrical	
Voltage Rating:	300 VAC
Current rating:	6 AMPS
Wire Range:	16-24 AWG
Wire Strip Length:	7.0mm
Withstand Voltage:	1.3KV
Mechanical	
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Soldering Temperature:	260°C, 500°F for 10 seconds max.
Safety Approval:	

Note:

- 22 and 24 AWG stranded must be twisted together before insertion to ensure proper detecting switch function.

UNLESS OTHERWISE SPECIFIED
ONE PLACE ±0.3
HUND. ±0.2 FRACT. ±1/64
TWO PLACES ±0.10
THOU. ±0.05 ANGLE ±1°

TITLE:
5.00mm SPACING, MODULAR, PLUGGABLE

LIMITS: UNLESS OTHERWISE SPECIFIED
ONE PLACE ±0.3
HUND. ±0.2 FRACT. ±1/64
TWO PLACES ±0.10
THOU. ±0.05 ANGLE ±1°

SCALE: THIS IS A CONFIDENTIAL DRAWING AND MUST BE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EB ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EB Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS
ONE PLACE ±0.3
HUND. ±0.2 FRACT. ±1/64
TWO PLACES ±0.10
THOU. ±0.05 ANGLE ±1°

DRAWN: MWP DATE: 06/25/20
CHECKED: _____ DATE: _____
APPROVED: _____ DATE: _____

SIZE: A DRAWING NUMBER: EB4898-XX-X00 REV. E