

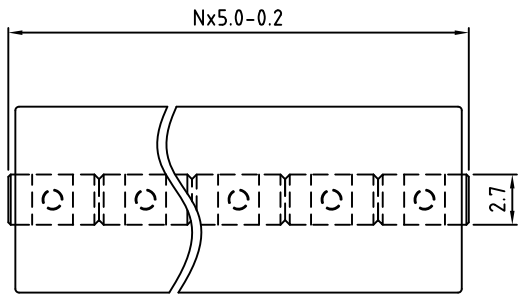


RoHS Compliant



Rev.	ECO#	Date	By
J	1546-0723	07/18/23	MWP

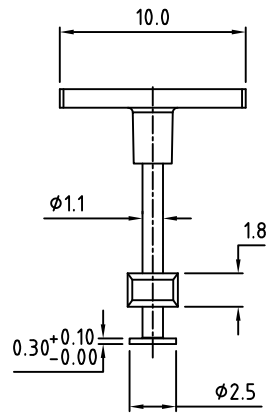

N=Number of Positions

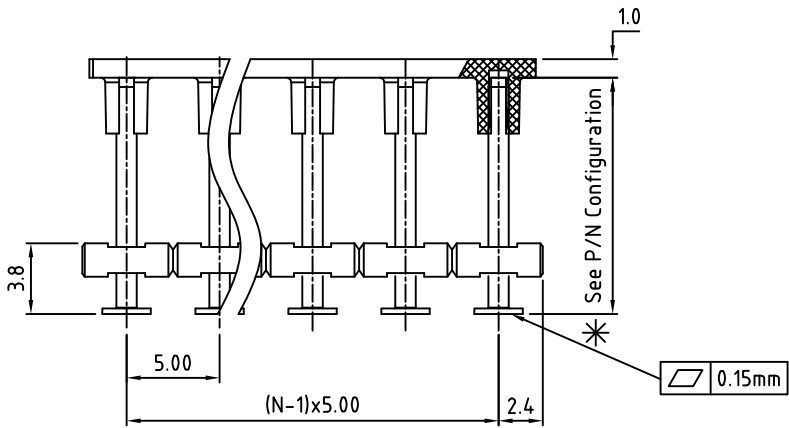


Material:	
Contact Solder Pin:	Brass, Tin Plated
Insulating Body:	Polyamide, UL94V-0 See P/N Config. for Plastic Carrier Material
Pickup Cover:	Polyamide, PA46
Electrical	
Voltage Rating:	300 VAC
Current rating:	15 AMPS
Withstand Voltage:	1500 VAC, Test time 60 seconds
Mechanical	
Operating Temperature:	-40°C to +125°C -40°F to +257°F
Soldering Temperature:	260°C, 500°F for 5 seconds max.
Safety Approval:	US

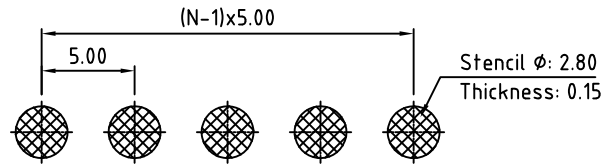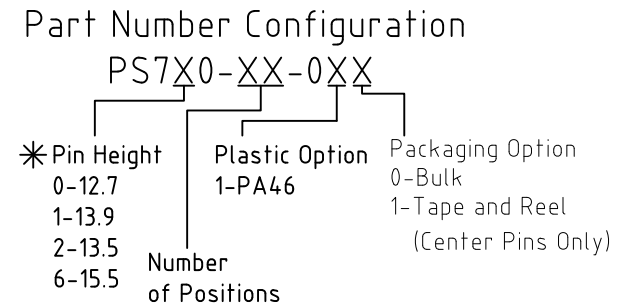


P.C.B. Layout

Pickup Covers (Optional)



3 Pole Cover for Odd # of poles



2 Pole Cover for Even # of poles

Max Number of Positions = 12

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE: 5.00mm SPACING, PIN STRIP WITH OPTIONAL PICK AND PLACE COVER
LIMITS: UNLESS OTHERWISE SPECIFIED HUND. ±.02 FRACT. ±1/64 THOU. ±.005 ANGLE ±1°	SCALE: THIS IS A CONFIDENTIAL DRAWING AND MUST BE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYS ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYS Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ±1°	DRAWN: JM CHECKED: _____ APPROVED: _____	DATE: 11/25/09 DATE: _____ DATE: _____	SIZE: A	DRAWING NUMBER: PS7X0-XX-0XX	REV.: J
--	--	--	---------	------------------------------	---------