
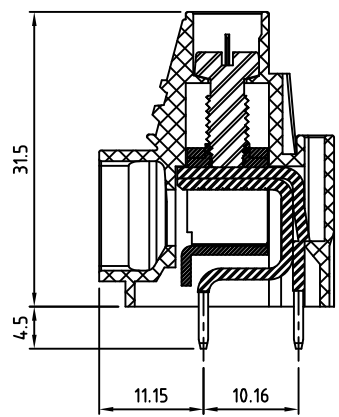
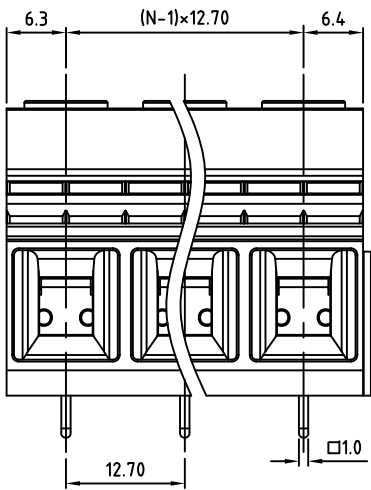


Pb RoHS Compliant

Rev.	ECO#	Date	By
A	0978-1114	11/18/14	AJT

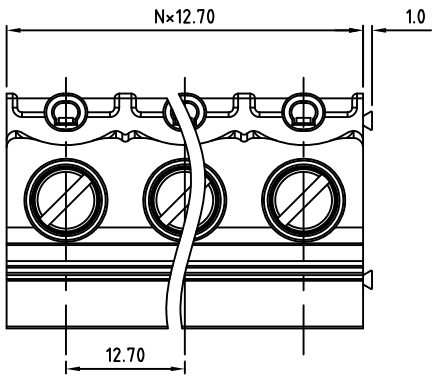


Material:	
Contact Block:	Steel Stamping, Zinc Plated
Contact Solder Pin:	Copper, Tin Plated
Screw:	M4.5, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	600 VAC
Current rating:	65 AMPS
Withstand Voltage:	2200 VAC, Test time 60 sec
Wire Range:	6-20 AWG
Mechanical	
Torque:	19.0 lbs-in. Max
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Soldering Temperature:	260°C, 500°F for 5 seconds
Safety Approval:	UL US

Part Number Configuration.

EB1130-XX-500

Number of Positions: X
Color: 5-Green

N=Number of Positions

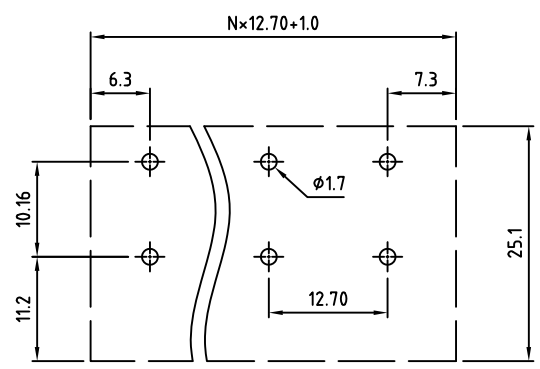

PCB Layout

(Other Color Options Available)
Please consult Factory

Max Number of Positions = 12

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE: 12.70mm SPACING, CAGE CLAMP BLOCK
---	---

LIMITS: UNLESS OTHERWISE SPECIFIED HUND. ± 0.2 THOU. ± 0.05	FRACT. ± 1/64 ANGLE ± 1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUST BE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYP ELECTRO INC.	Electro Inc. PLAINVIEW, NY 11803
---	-----------------------------	-------	--	-------------------------------------

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYP Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS ONE PLACE ± 0.3 TWO PLACES ± 0.10 ANGLE ± 1°	DRAWN JM CHECKED APPROVED	DATE 09/10/10 DATE DATE	SIZE A	DRAWING NUMBER: EB1130-XX-500	REV. A
---	---------------------------------	-------------------------------	-----------	----------------------------------	-----------