

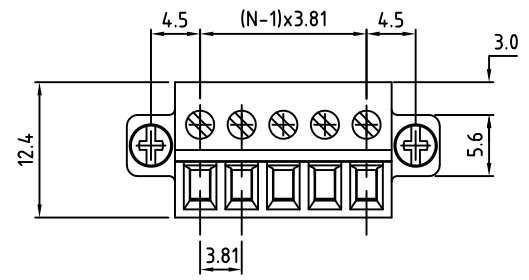



RoHS Compliant

Rev.	ECO#	Date	By
C	1588-0824	08/20/24	MWP



N=Number of Positions

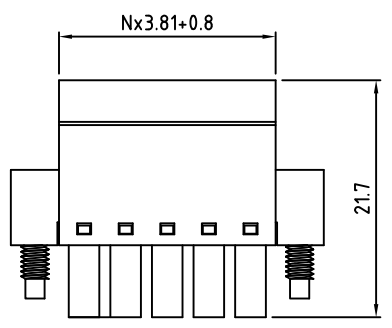

Material:	
Contact Housing:	Steel, Zinc Plated
Contact Cam:	Steel, Zinc Plated
Contact Clip:	PhBz, Tin Plated
Screw:	M2, Steel, Zinc Plated, "-" slotted
Flange Screw:	M2.5, Steel, Zinc Plated, phil slot
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	300 VAC
Current rating:	10 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range:	16-28 AWG
Mechanical	
Torque:	1.7 lbs-in. Max
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Safety Approval:	C US

Part Number Configuration.
 EB1388M-XX-X00
 Number of Positions: X
 Color: X (5-Green)

(Other Color Options Available)
 Please consult Factory

Max Number of Positions = 24 All Dimensions in Millimeters

TITLE: 3.81mm SPACING, PLUGGABLE BLOCK, WITH MOUNTING ENDS

METRIC LIMITS
 ONE PLACE ±0.3
 TWO PLACES ±0.10
 ANGLE ± 1°

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EB ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EB Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

DRAWN JM DATE 10/23/08
 CHECKED DATE
 APPROVED DATE

SIZE A

DRAWING NUMBER: EB1381M-XX-X00

REV. C