


N=Number of Positions

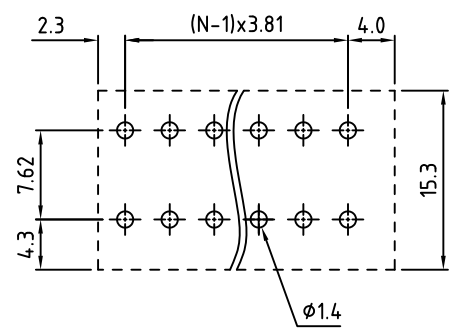

P.C.B. Layout

Material:	
Contact Solder Pin:	Brass, Tin Plated
Wire Guard:	Steel, Zinc Plated
Screw:	M2, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	300 VAC
Current rating:	8 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range:	16-26 AWG
Mechanical	
Torque:	2.0 Lbs-in. Max
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Soldering Temperature:	260°C, 500°F for 5 seconds
Safety Approval:	UL US

Part Number Configuration.

EB2216-XXDS-500  
 |                      |  
 Number of      Color  
 Positions        5-Green

(Other Color Options Available)  
 Please consult Factory

Max Number of Positions = 24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE:	3.81mm SPACING, WIRE GUARD BLOCK
---	--------	----------------------------------

LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02      FRACT.±1/64 THOU.±.005      ANGLE±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYS ELECTRO INC.		PLAINVIEW, NY 11803
	DRAWN <u>  JM  </u> DATE <u>  12/29/08  </u> CHECKED _____      DATE _____ APPROVED _____      DATE _____			

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYS Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ± 1°	DRAWING NUMBER: EB2216-XXDS-500	REV. A
---	------------------------------------	-----------