
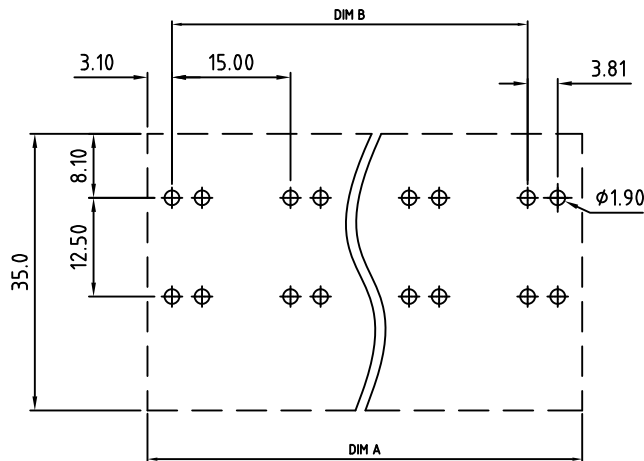
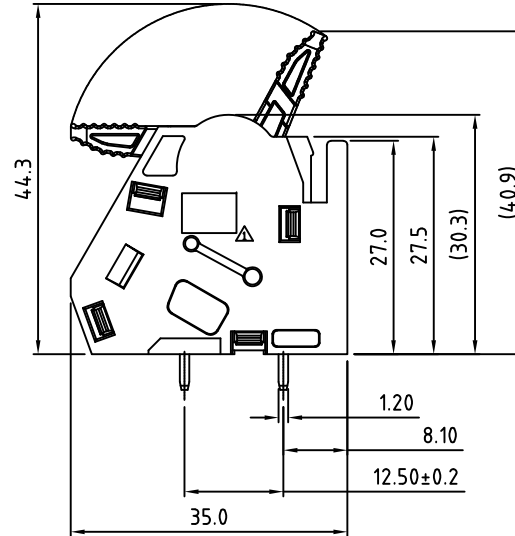


N=NUMBER OF CONTACTS


| DIM   |            | TOL   |        |        |
|-------|------------|-------|--------|--------|
|       |            | 2P    | 3P--4P | 5P--8P |
| Dim A | N×15.0-5   | ±0.50 | ±0.50  | ±0.60  |
| Dim B | (N-1)×15.0 | ±0.25 | ±0.50  | ±0.60  |

RoHS Compliant

|      |      |      |    |
|------|------|------|----|
| Rev. | ECO# | Date | By |
|------|------|------|----|

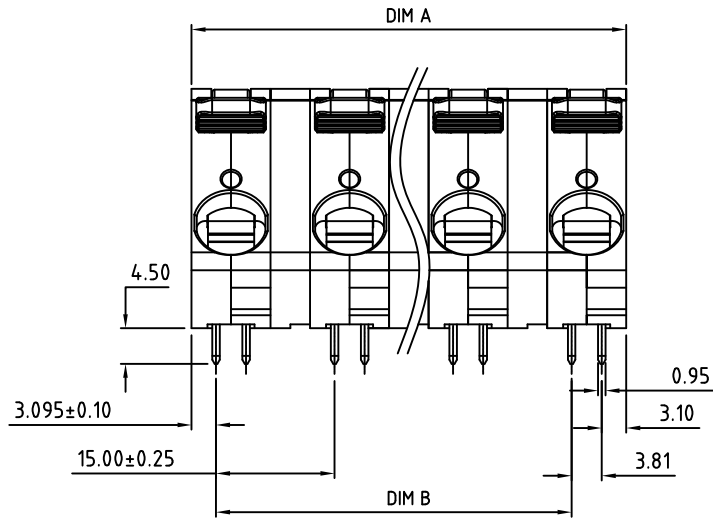


PCB Layout

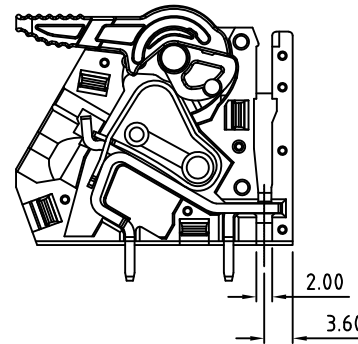

| Material:              |  |
|------------------------|--|
| Contact:               | Copper, Matte Tin over Ni Plating      |
| Wire Retention Spring: | Stainless Steel                        |
| Lever:                 | Thermoplastic, UL94V-0, White, RAL9003 |
| Insulating Body:       | Thermoplastic, UL94V-0                 |
| Electrical             |  |
| Voltage Rating:        | 600 VAC                                |
| Current rating:        | 65 AMPS                                |
| Withstand Voltage:     | 2200 VAC, Test time 60 sec             |
| Wire Range:            | 6-16 AWG                               |
| Mechanical             |  |
| Wire Strip Length:     | 12-13mm                                |
| Operating Temperature: | -40°C to +115°C<br>-40°F to +239°F     |
| Soldering Temperature: | 260°C, 500°F for 5 seconds             |
| Safety Approval:       | US                                     |

Part Number Configuration.

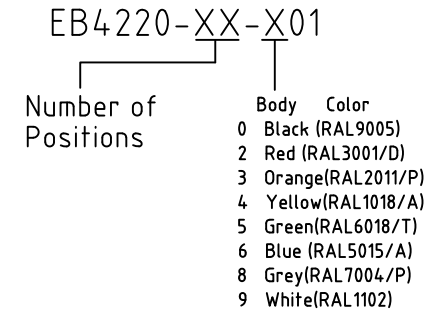

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

TITLE: 15.00mm Spacing, Modular, With Jumper Slot

LIMITS: UNLESS OTHERWISE SPECIFIED  
HUND.±02 FRACT.±1/64  
THOU.±005 ANGLE±1°

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EB4 ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EB4 Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS  
ONE PLACE ±0.3  
TWO PLACES ±0.10  
ANGLE ±1°

DRAWN MWP DATE 08/29/18  
CHECKED DATE  
APPROVED DATE

SIZE A

DRAWING NUMBER: EB4220-XX-X01

REV.