

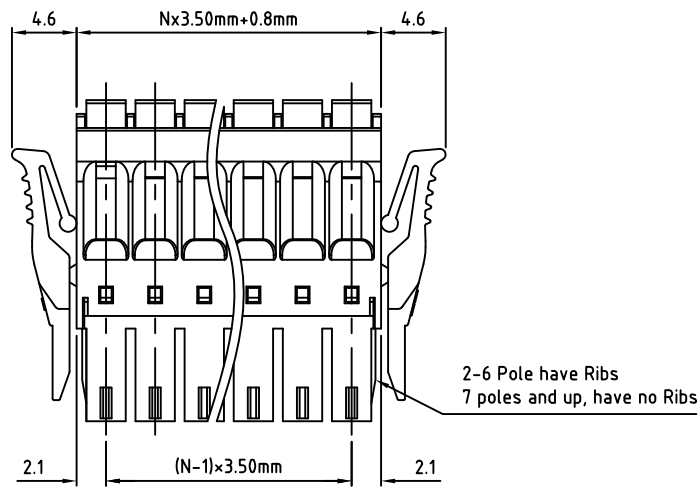


Pb RoHS Compliant

Rev.	ECO#	Date	By
A	0165-0412	04/20/2012	MWP

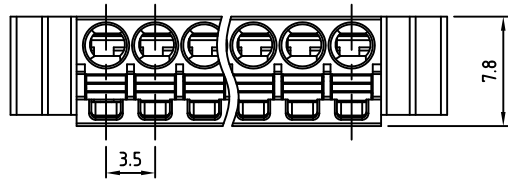


Material:	
Contact Clip:	PhBz, Tin Plated
Wire Retention Spring:	Stainless Steel
Insulating Body:	Polyamide, UL94V-0, Green
Electrical	
Voltage Rating:	160 VAC
Current rating:	5.5 AMPS
Withstand Voltage:	1320 VAC, Test time 60 sec
Wire Range:	16-24 AWG
Mechanical	
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Safety Approval:	UL US

Part Number Configuration.

EB446-XX-500  
 |                   |  
 Number of      Color  
 Positions       5-Green

N=Number of Positions

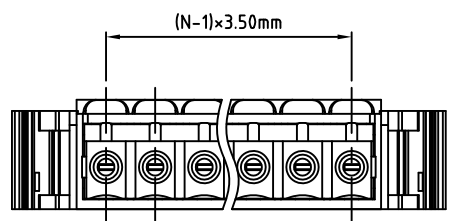

(Other Color Options Available)  
 Please consult Factory

Max Number of Positions = 24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES  
 TITLE: 3.50mm SPACING, SCREWLESS PLUGGABLE WITH MOUNTING LATCH

LIMITS: UNLESS OTHERWISE SPECIFIED HUND. ±0.02    FRACT. ±1/64 THOU. ±0.005    ANGLE ±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUST BE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EB Y ELECTRO INC.	<b>EBY</b> Electro Inc. PLAINVIEW, NY 11803
------------------------------------------------------------------------------------------------	-------	--------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EB Y Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.	METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ±1°	DRAWN <u>  JM  </u> DATE <u>  10/08/08  </u>	SIZE <u>  A  </u>	DRAWING NUMBER: <u>  EB446-XX-500  </u>	REV. <u>  A  </u>
		CHECKED _____    DATE _____			
		APPROVED _____    DATE _____			