

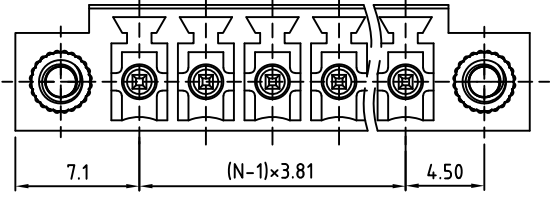


RoHS Compliant

Rev.	ECO#	Date	By
E	1595-1024	10/08/24	MWP

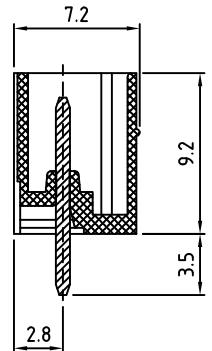

Material:	
Contact Solder Pin:	Copper, Tin Plated
Insulating Body:	Polyamide, UL94V-0
Mounting Flange Nut:	M2.5, Brass
Electrical	
Voltage Rating:	300 VAC
Current rating:	10 AMPS
Withstand Voltage:	1500 VAC, Test time 60 seconds
Mechanical	
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Soldering Temperature:	260°C, 500°F for 5 seconds max.
Safety Approval:	US

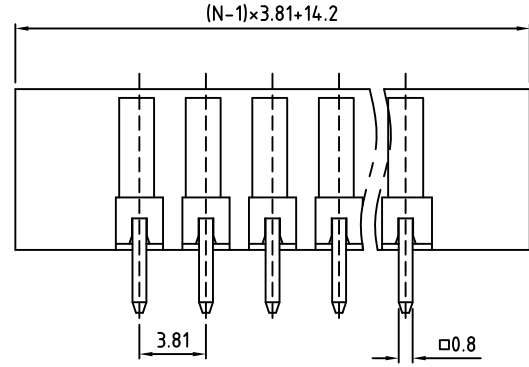


N=Number of Positions

Part Number Configuration.

VC1381M-XX-X00

- Number of Positions
- Color Options
 - 0-Black (RAL 9005)
 - 2-Red (RAL 3001/D)
 - 3-Orange (RAL 2011/P)
 - 4-Yellow (RAL 1018/A)
 - 5-Green (RAL6018/T)
 - 6-Blue (RAL 5015/A)
 - 8-Gray (RAL7035/D)

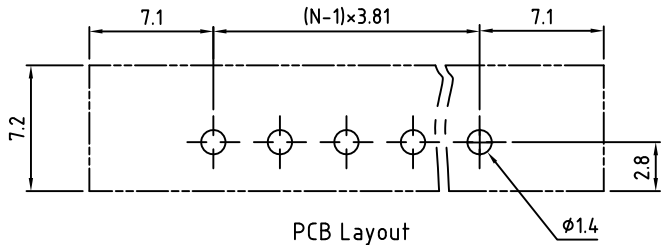

Number of Positions = 24 All Dimensions in Millimeters

TITLE: 3.50mm Spacing, Pluggable Header, With Mounting ends

METRIC LIMITS
ONE PLACE ±0.3
TWO PLACES ±0.10
ANGLE ± 1°

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYP ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYP Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

DRAWN JM DATE 05/09/08
CHECKED DATE
APPROVED DATE

SIZE A DRAWING NUMBER: VC1350M-XX-X00 REV. E