

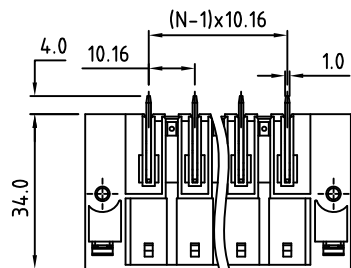
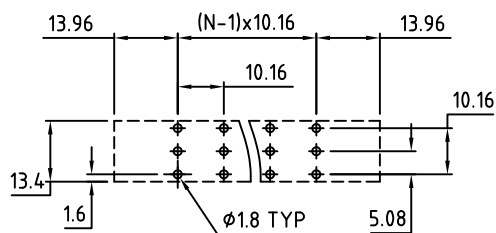


Rev.	ECO#	Date	By
E	0697-0713	07/19/13	AJT

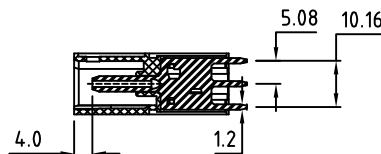

N=Number of Positions

Poles	Tolerance
2p-5p	±0.25
6p-8p	±0.35



PCB Layout

Material:	
Contact Solder Pin:	Copper, Gold Plated
Insulating Body:	Polyamide, UL94V-0
Mountable Screw Cavity:	M3 Thread, Steel, Zinc Plated
Electrical	
Voltage Rating:	300 VAC
Current rating:	55 AMPS
Withstand Voltage:	2200 VAC, Test time 60 seconds
Mechanical	
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Soldering Temperature:	260°C, 500°F for 5 seconds max.
Safety Approval:	UL US

Part Number Configuration.

VC1860M-XX-000

Number of Positions    Color  
0-Black

(Other Color Options Available)  
(Please consult Factory)

MAX NUMBER OF POSITIONS = 8

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

TITLE: 10.16mm SPACING, PLUGGABLE HEADER MOUNTABLE, VERTICAL, CLOSED

LIMITS: UNLESS OTHERWISE SPECIFIED  
HUND.±.02    FRACT.±1/64  
THOU.±.005    ANGLE±1°

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYS ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYS Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS  
ONE PLACE ±0.3  
TWO PLACES ±0.10  
ANGLE ± 1°

DRAWN JM    DATE 05/09/08  
CHECKED    DATE  
APPROVED    DATE

SIZE  
A

DRAWING NUMBER:  
VC1860M-XX-000

REV.  
E