

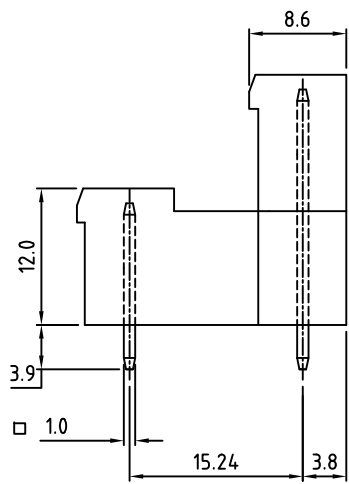
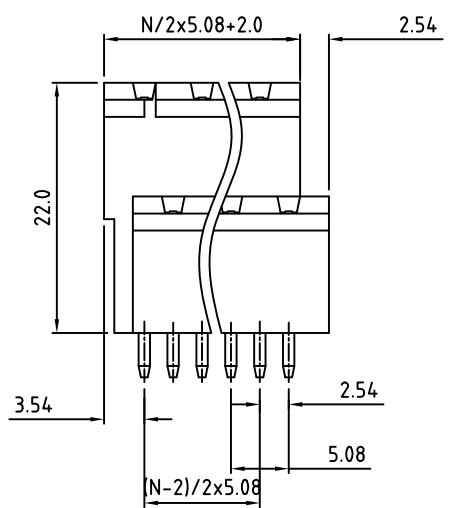


RoHS Compliant

Rev.	ECO#	Date	By
A	0497-0413	04/29/13	AJT



Material:	
Contact Solder Pin:	Copper, Tin Plated
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	300 VAC
Current rating:	20 AMPS
Withstand Voltage:	1500 VAC, Test time 60 seconds
Mechanical	
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Soldering Temperature:	260°C, 500°F for 5 seconds max.
Safety Approval:	UL US

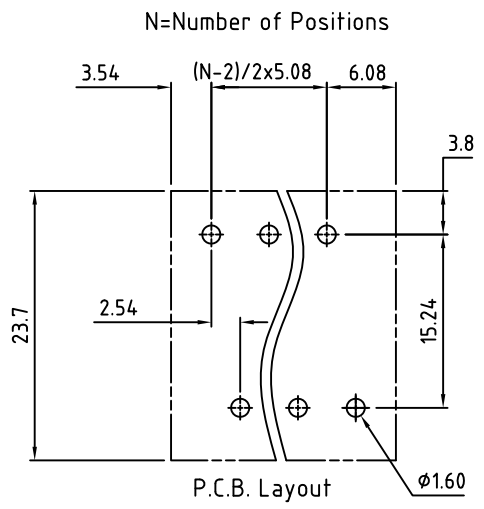

Part Number Configuration.

VC1508-XX-520  
 |                   |  
 Number of        Color  
 Positions         5-Green

(Other Color Options Available)  
 (Please consult Factory)

Max Number of Positions = 2x24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

TITLE: 5.08mm SPACING, PLUGGABLE HEADER DUAL TIER, VERTICAL, CLOSED

LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±0.02    FRACT.±1/64 THOU.±0.005    ANGLE±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUST BE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC.	EBY Electro Inc. PLAINVIEW, NY 11803
--	-------	---	---

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ±1°	DRAWN <u>  JM  </u> DATE <u>10/20/08</u>	SIZE <u>  A  </u>	DRAWING NUMBER: <u>  VC1508-XX-520  </u>	REV. <u>  A  </u>
	CHECKED _____ DATE _____			
	APPROVED _____ DATE _____			